






STOVE STRUCTURE CODE 7014014  
EAN 8033123614696

## STEEL

-  ANTHRACITE  
6914011  
EAN 8033123614863
-  WHITE  
6914009  
EAN 8033123614849
-  RED  
6914008  
EAN 8033123614832
-  SILVER  
6914010  
EAN 8033123614856

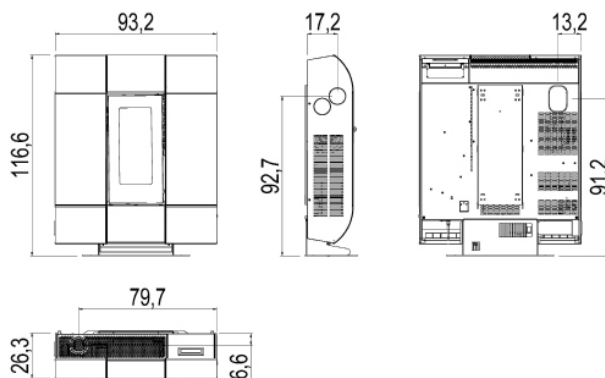

## EXTRA



Hopper, back and lateral exhaust



Overheating protection



Cold hand



Connection to the external thermostat



Daily weekly programming



Remote control



Ductible with 1 independent motor





Steel burning pot AISI

## TECHNICAL DATAS


Nominal power	kW	<b>9</b>
Reduced power	kW	<b>2,4</b>
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	<b>92,5</b>
Reduced efficiency	%	<b>92</b>
Heating volume (min-max)	m <sup>3</sup>	<b>58 - 216</b>
Nominal CO at 13% O <sub>2</sub>	%	<b>0,008</b>
Reduced CO at 13% O <sub>2</sub>	%	<b>0,027</b>
Nominal dust content at 13% O <sub>2</sub>	mg/Nm <sup>3</sup>	<b>2</b>
Boiler capacity (H <sub>2</sub> O)	l	-
Hopper capacity	kg	<b>18</b>
Combustible		<b>Pellet ø6</b>
Hourly consumption (min-max)	kg/h	<b>0,5 - 1,97</b>
Autonomy (min-max)	h	<b>36 - 9</b>
Ignition electrical absorption (max)	W	<b>350</b>
Operating electrical absorption (max)	W	<b>50</b>
Supply and frequency	V - Hz	<b>230 - 50</b>
Chimney flue depression	Pa	<b>11</b>
Exhaust diameter	mm	<b>80</b>
Combustion air inlet diameter	mm	<b>40</b>
Mass of smoke (min-max)	g/sec	<b>3,3 - 5,63</b>
Exhaust fumes temperature (max)	°C	<b>155</b>
Net weight	kg	<b>125</b>
Gross weight	kg	<b>135</b>

## PACKAGING AND STOCKING

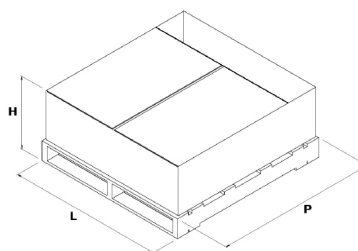

L (cm)	<b>120</b>
H (cm)	<b>54,6</b>
P (cm)	<b>120</b>

## LINING PACKING



LINING	L (cm)	H (cm)	P (cm)
Steel	<b>115</b>	<b>18</b>	<b>31</b>



EN 14785:2006



BlmSchV 2015



Regensburg

München

Stuttgart

Aachen

Art. 15A B-VG 2015